


M

MINOSTON[®]
Outdoor Wireless
Outlet with Remote
•MP22R-1•
Meet your new smart Plug !

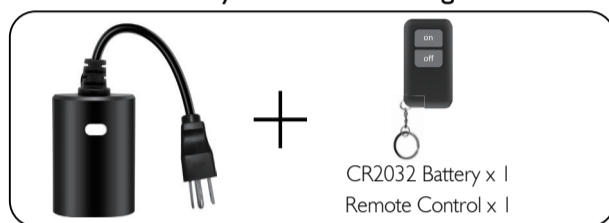

(A) Manual / Program button
ON / OFF


(B) Smart Outlet
This is your smart outlet that will be included in your smart home.

(C) Protector
Insert in connector when not in use.

For outdoor use

Specifications


Model: MP22R-1
Power: 125VAC 60Hz
Item Size: 3.9x1.97x5.8 in
Loading: 15A
Wireless Frequency: 433MHZ



Use our screws and anchor to lock it in the wall. (optional)

Plug the light you want to control into the Smart plug controlled outlet.

NOTE: Plug directly into the outlet, do not use with power strip.



PROGRAMMING THE OUTLETS



Notes: The outlet is pre-programmed for immediate use, but the configuration can be customized to meet your needs. To pair receiver to transmitter

1. Plug the receiver outlet to a power outlet.
2. Press and hold the ON/OFF button on the receiver outlet for 3 seconds and the LED indicator will start flashing slowly.
3. Release the ON/OFF button on the receiver and press ON or OFF button on the transmitter to pair the transmitter to the receiver.

If you have any questions, please contact us at
ask@minoston.com

Introduction

The Minoston MP22R-1 is an enabled 15A (1875W) Resistive outdoor smart plug designed for use seasonal and landscape lighting, porch light, fountains, pumps and other indoor and outdoor plug-in appliances. It's compatible with LED, halogen, incandescent, xenon, fluorescent and compact fluorescent bulbs.

FEATURES

- Easily controlled by the remote control from up to 100 feet in line-of-sight.
- Separate on and off buttons on the remote control.
- Outlets will remain powered off after a power outage to save energy.
- Power output up to 1875W at 125V (60Hz).
- Low power consumption, reduces energy use and extends product life by up to 15%.
- Manual pairing.

SETUP

- Install one CR2032 battery in the remote control's battery compartment, making sure the polarity of the battery is correct.
- Plug the receiver into an outlet and plug a device or appliance into an outlet of the receiver.
- Press the ON or OFF button on the remote control to operate the receiver outlet.

NOTES

- Regularly change the battery in the remote control for best performance. If you find the outlet switch is not responding or the LED indicator on the remote control becomes dim, the battery should be replaced. Always dispose of old batteries properly with consideration for the environment.
- Make sure the battery and outlets are installed firmly and correctly for safe operation.
- The outlet switch is for indoor and outdoor use.
- Use only in well-ventilated areas.
- Do not exceed the maximum load current of 15A (Approximately 1875W).

TROUBLESHOOTING

In the case that the outlet receiver does not respond to the remote control, please follow the steps given below to resolve the issue:

1. Check to see if the battery of the remote is low and needs replacement.
2. Make sure that the outlet receiver is correctly placed in the power socket.
2. Make sure that the outlet receiver is correctly placed in the power
3. Make sure that the outlet receiver is used in an area with proper air circulation to avoid overheating.
4. Reset and program the outlet.

TECHNICAL DATA

Voltage..... 125V~60Hz
Resistive 15A 1875W
Tungsten 8A 1000W
Transmission frequency.....433.92MHz
Remote battery.....CR2032

FCC warning:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
- changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a

particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

⚠ CAUTION - PLEASE READ!

This device (MP22R-1) is intended for installation in accordance with the National Electric Code and local regulations in the United States, or the Canadian Electrical Code and local regulations in Canada. If you are unsure or uncomfortable about performing this installation consult a qualified electrician.

⚠ MEDICAL EQUIPMENT

Please DO NOT use this plug to control Medical or Life Support equipment. This device should never be used to control the On/Off status of Medical and/or Life Support equipment.

⚠ OTHER WARNINGS

Risk of Fire / Risk of Electrical Shock / Risk of Burns

IMPORTANT SAFETY INSTRUCTIONS

1. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.
2. Read and follow all instructions that are on the product or provided with the product.
3. do not use an extension cord.
4. Reference the National Electrical Code, NFPA 70, specifically for the installation of wiring and clearances from power and lighting conductors.
5. Installation work and electrical wiring must be done by qualified person(s) in accordance with all applicable codes and standards, including fire-rated construction.
6. do not install or use within 10 feet of a pool

8. WARNING: Risk of Electric Shock.

When used outdoors, install only to a covered Class A GFCI protected receptacle that is weatherproof with the power unit connected to the receptacle. If one is not provided, contact a qualified electrician for proper installation.

Ensure that the power unit and cord do not interfere with completely closing the receptacle cover.

9. WARNING: Risk of Electric Shock. Mount the unit at a height greater than 1 foot from the ground surface

10. WARNING: Risk of Electric fire.

install only to a receptacle protected by 20A branch circuit over current protection.

SAVE THESE INSTRUCTIONS – This manual contains important safety and operating instructions.