

parts diagram



①	Smart electric sunroof shade	⑤	Phillips screwdriver
②	Cigarette lighter switch cable	⑥	
③	Latch and screw	⑦	
④	Covering cloth	⑧	

1. Tools required for installation


Plastic trim removal, Phillips screwdriver, threading tape

2. Installation precautions

Caution: Please ensure the power off operation, to prevent failure code.

Tips: For faster installation, be sure to read the instructions carefully

Short press - forward/backward auto-scaling
Press --Pause/Start

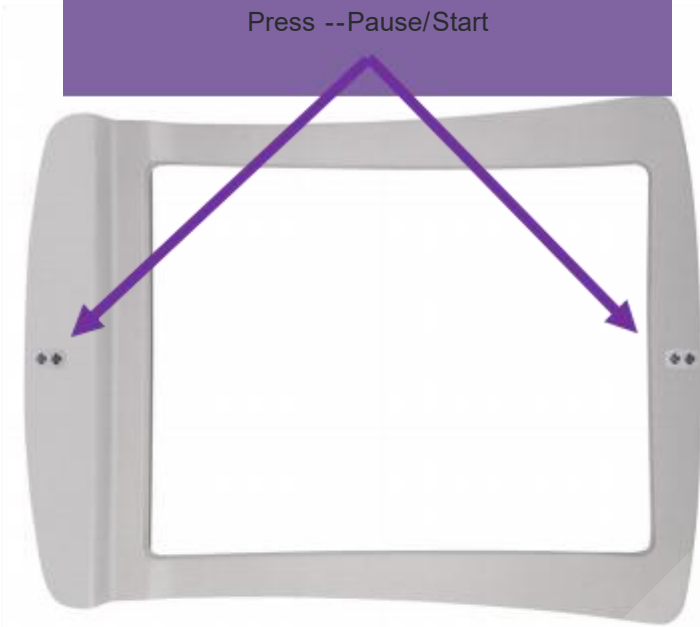

Electric motor contraction

Lossless installation

Open and Close with one click

Shade and cool down

Original color

Sun protection and insulation

High grade shade cloth

Silence without stuttering

Year: 21+Model Y

Name: Model Y intelligent electric sunroof shade


LHD and RHD: Not distinguish Processor: Does not distinguish Inet/AMD

Product Features :

1. Installation: special car, original car mold, non-destructive installation, no damage to the original car parts
2. Experience: hot summer, sunshade solarization to protect the car, summer is to enjoy air conditioning level cooling
3. Process: the use of car level 5 layer composite heat insulation shade cloth, original color
4. Function: a key to open and close electric expansion, shading and cooling, avoid sunlight and heat insulation

Product description :

- 1) Special car, the original car opening mold and the original roof seamless combination of 100% cover no light leakage, one installation, convenient and fast, no installation experience, can achieve 15-20 minutes of rapid and non-destructive installation, will not damage the interior of the original car.
- 2) Hot summer, all day long, shade to protect the car, summer is to enjoy air-conditioning level cooling sun protection is urgent, no deformation no noise.
- 3) The use of car gauge level 5 layers of composite heat insulation sunshade cloth, the original color, into the car color is more beautiful, more harmonious, shading heat insulation without odor, comprehensive upgrade, simple and beautiful, to avoid high temperature exposure in the car, heat insulation and cooling.
- 4) Intelligent electric free retractable, minimalist design, shading straight down temperature (cover and not cover at a glance), easy adjustment with one hand, want to cover where to cover where in one step, with the press, silent, anti-thermal insulation, full coverage of anti-light zero, fear of fierce summer.

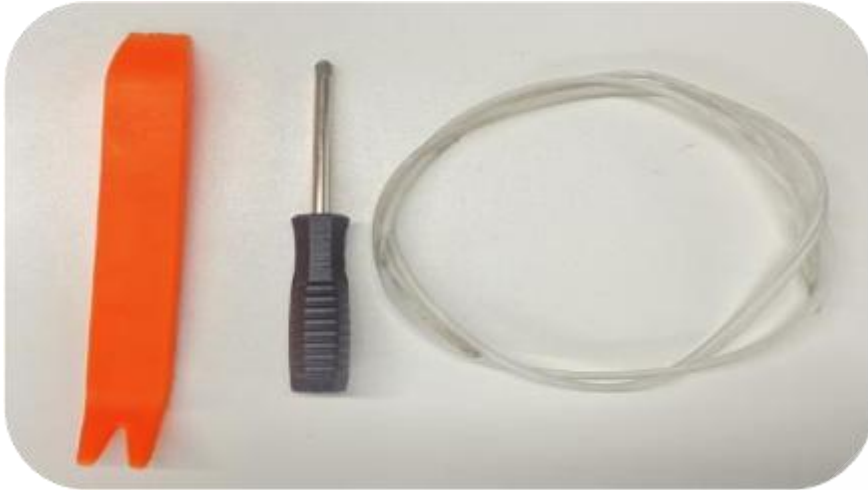

1. Installation tools: plastic trim removal board, Phillips screwdriver



2. Turn off the main power in the vehicle setting



3. Press the rear-seat button from the trunk



4. Use plastic trim removal take off the left trim of the trunk



5. After remove the trim, find the plug of the original car cigarette lighter



6. Connect with our products wiring harness



7. Take off the upper left panel



8. Move the harness to the top

Installation Instruction



9. Use the threading tape from the back to the back window



10. Glass position on the top of the back window



11. Use tape to tie the power plug to the back of the threading tape



12. Pull down the upper glass in the back window and untie the tape



13. Lift the shade into the car (two people are recommended to operate)



14. Connect the plug on the motor into the power plug that passes through the front (hide the plug in the roof).



15. Insert the pin behind the shade curtain into the rear trim board (hold it after inserting)



16. Insert these two latches into the gap between the glass and the trim above the front seat (left and right).

Installation Instruction



17. Insert the bolt (left and right the same)



18. Need to push the shade up the top, as shown in the figure, align the screw eye (left and right the same)



19. Use a Phillips screwdriver to screw (left and right the same)



20. Cover the bare parts of the front seat like silver (Restoration is enough)

issue	reason	solution
After installation, press the button to not open or close	Check the cigarette lighter is connected	Reconnect the cigarette lighter
	Check that the pairings are connected	Connect the cable
The installation does not match	Incorrect installation	Scan the QR code for installation instructions or installation video (front and rear bars are correct)
Not stretch	Check the transverse bar is damaged during transportation	Contact customer service processing
It's gonna stall in the middle of it	The position is stuck	Pay attention to the installation position
Crinkled	Installation technique	Straighten and fix the fold again