

## Parts list diagram

①



④



③

①	Pilot light	③	Tail light connector ( R )
②	Tail light connector ( L )	④	Extension harness

### 1. Tools required for installation

Plastic crowbar; Fish tape

### 2. Installation precautions:

**Please ensure that the power is turned off to prevent malfunctions.**

Tip: For faster installation, be sure to read these instructions carefully.



1. Remove the trunk trim panel



2. Remove the clips (The same applies to the left and right)



3. Remove the rear tow hook cover



4. Use the fish tape to pass through the gap inside the door seal to the position of the rear under cover



5. Pull the fish tape to this position



6. Tie the extension harness on it, and then pull it to the tail light position




7. The pilot light and the extension harness plug are plugged into each other.



8. Align the position of the original car and insert the pilot light.



9. Fold the wire harness slightly, and then press it with a tape (Do not thread it through the taillight hole)

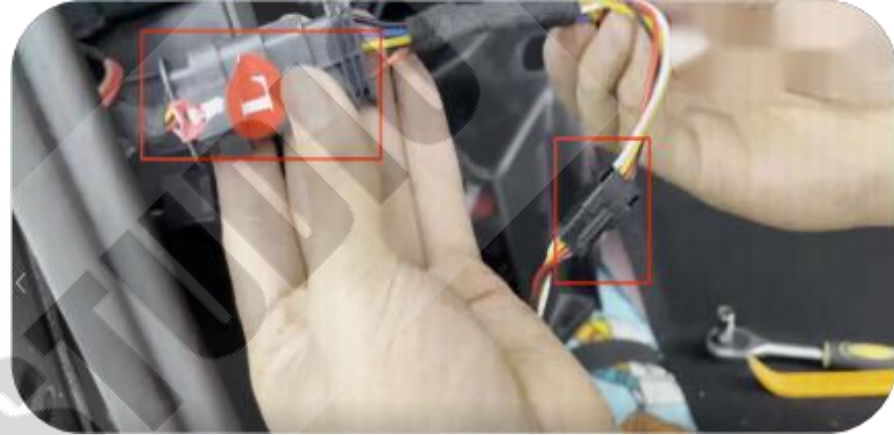


10. Plug the large plug into the taillight and the small plug into the extension harness (The same applies to the left and right)





Cyber Pilot Light

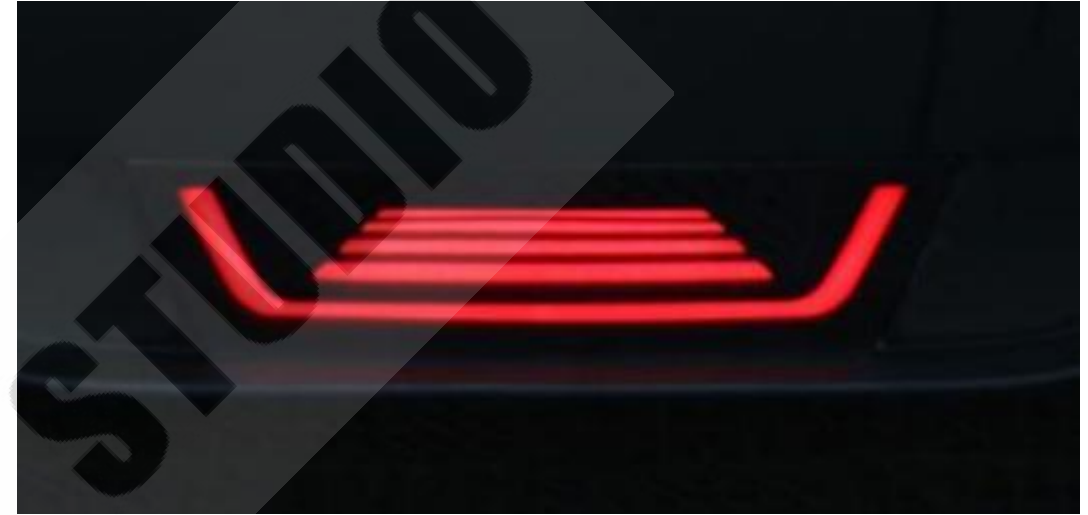

Zebra Crossing Pilot Light

Question	Reason	Solution
Turn signal malfunction	Plug in reversely with the taillight docking plug	Replace the taillight plug from left to right, and from right to left
Pilot light not on	Pilot light plug loose	Unplug the plug again
Package Size;	26X23X15CM	
weight;	0.95KG	

